

Reliable protection of sensitive system components

Redundancy, diode and capacity modules

In many automation applications, power supply systems are required that function reliably even if a power supply unit fails. With our optimally coordinated supplementary modules, a permanent supply concept is created. Weidmüller's diodes and redundancy modules connect two power supplies to each other in order to compensate for the failure of one device. In addition, Weidmüller has a capacity module that has sufficient energy reserves to, for example, connect a miniature circuit breaker to the power supply. quickly and purposefully.

Diode modules

The diode modules allow with 20 A or 40 A output current to the construction of safe power supply systems.



Redundancy modules

Redundancy modules increase system availability is decisive. Each redundant branch is able to supply full output load. The 24-V control voltage remains stable in the event of a power supply failure. The use of MOSFETs in our redundancy modules allows for a optimum efficiency.

Capacity module

The capacity modules provide sufficient energy reserves ready, for example, to meet the demand for a motor start. and I'll cover for you. In addition, the reserve enables the selective circuit breaker tripping in the case of an Short-circuit.




Redundancy module

- Up to 40 A per input
- Individually adjustable current warning for Overload directly at the device
- Suitable for EX areas

The space- and energy-saving system solution

- The compact design saves up to 30 % space in the switch cabinet
- The high degree of efficiency of up to 98 % ensures for low energy costs

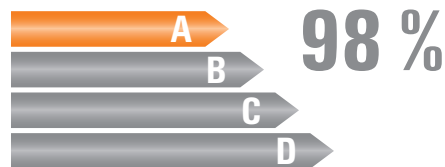

Capacity module

- Integrated alarm relay for monitoring the input voltage
- Optical status monitoring by red/green LEDs
- Remote messages via potential-free contact

Diode module



- Ideal for setting up trouble-free systems
- In versions with 20 or 40 A output current obtainable
- Also suitable for small systems

connectPower redundancy modules

connectPower redundancy modules

PRO RM 10

PRO RM 20

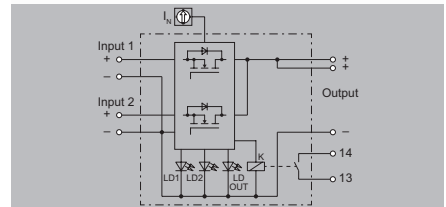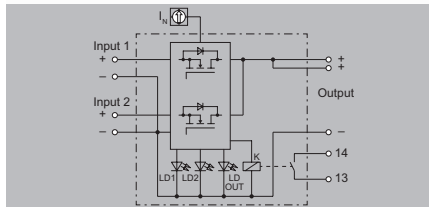

Technical data

Input	
DC input voltage range	
Input current	
Output	
Rated output voltage	
Continuous output current @ $U_{Nominal}$	
General data	
Ambient temperature (operational)	
Storage temperature	
Derating	
Degree of efficiency	
Mounting position, installation notice	
Depth x width x height / Net weight	
Approvals	

10 ... 32 V DC
2 × 12 A (-40 °C ~ +45 °C), 2 × 10 A (+45 °C ~ +60 °C), 2 × 7.5 A (+70 °C)
$V_{INPUT-typ. 0.13 V}$
1 × 24 A (-40 °C ~ +45 °C), 1 × 20 A (+45 °C ~ +60 °C), 1 × 15 A (+70 °C)
-40 °C...70 °C
-40 °C...85 °C
> 60°C / 75% @ 70°C
> 98%
Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between.
125 / 30 / 130 mm / 497 g
cULus; DNVGL; EAC

10 ... 32 V DC
2 × 24 A (-40 °C ~ +45 °C), 2 × 20 A (+45 °C ~ +60 °C), 2 × 15 A (+70 °C)
$V_{INPUT-typ. 0.2 V}$
1 × 48 A (-40 °C ~ +45 °C), 1 × 40 A (+45 °C ~ +60 °C), 1 × 30 A (+70 °C)
-40 °C...70 °C
-40 °C...85 °C
> 60°C / 75% @ 70°C
> 98%
Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between.
125 / 38 / 130 mm / 558 g
cULus; DNVGL; EAC

Connection data	
Connection system	
Number of terminals	
Wire cross-section, rigid min/max	mm ²
Wire cross-section, flexible min/max	mm ²
Wire cross-section, AWG/kcmil min/max	
Note	

Input	Output
PUSH IN	PUSH IN
4 (+,+, -,-)	2 (+ / -)
0.2 / 2.5	0.2 / 10
0.2 / 2.5	0.2 / 6
26 / 12	24 / 8

Input	Output
PUSH IN	PUSH IN
4 (+,+, -,-)	2 (+ / -)
0.2 / 10	0.75 / 16
0.2 / 6	0.75 / 16
24 / 8	20 / 4

Ordering data

Screw connection

Type	Qty.	Order No.
PRO RM 10	1	2486090000

Type	Qty.	Order No.
PRO RM 20	1	2486100000


Note

Note

Note

connectPower redundancy modules

PRO RM 40

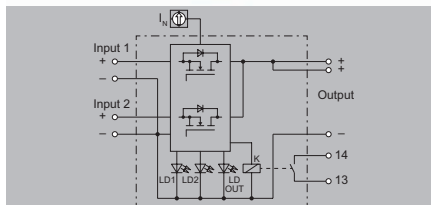

Technical data

Input	
DC input voltage range	10 ... 32 V DC
Input current	2 × 48 A (-40 °C ~ +45 °C), 2 × 40 A (+45 °C ~ +60 °C), 2 × 30 A (+70 °C)
Output	
Rated output voltage	V_{INOUT} -typ. 0.27 V
Continuous output current @ $U_{Nominall}$	1 × 96 A (-40 °C ~ +45 °C), 1 × 80 A (+45 °C ~ +60 °C), 1 × 60 A (+70 °C)
General data	
Ambient temperature (operational)	-40 °C...70 °C
Storage temperature	-40 °C...85 °C
Derating	> 60°C / 75% @ 70°C
Degree of efficiency	> 98%
Mounting position, installation notice	Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between.
Depth x width x height / Net weight	125 / 52 / 130 mm /
Approvals	cULus; DNVGL; EAC

Connection data		Input	Output
Connection system		Screw connection	Screw connection
Number of terminals		4 (+, +, -, -)	2 (+ / -)
Wire cross-section, rigid min/max	mm ²	0.2 / 16	0.5 / 16
Wire cross-section, flexible min/max	mm ²	0.5 / 16	0.5 / 35
Wire cross-section, AWG/kcmil min/max		22 / 6	20 / 1
Note			

Ordering data

Type	Qty.	Order No.
PRO RM 40	1	2486110000




Note
Screw connection

connectPower diode module

connectPower diode modules

PRO DM 10

PRO DM 20

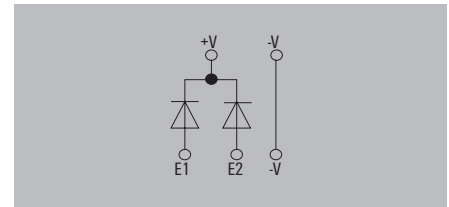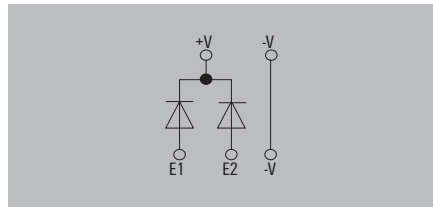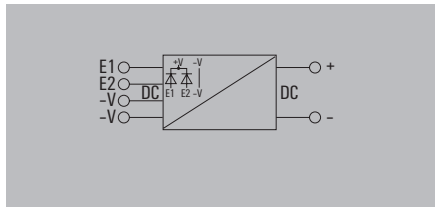

Technical data

Input
DC input voltage range
Input current
Output
Rated output voltage
Continuous output current @ $U_{Nominal}$
General data
Ambient temperature (operational)
Storage temperature
Derating
Degree of efficiency
Mounting position, installation notice
Depth x width x height / Net weight
Approvals

0...60 V DC
2 × 12 A (-40 °C ~ +45 °C), 2 × 10 A (+45 °C ~ +60 °C), 2 × 7.5 A (+70 °C)
$V_{INPUT-typ. 0.7 V}$
1 × 24 A (-40 °C ~ +45 °C), 1 × 20 A (+45 °C ~ +60 °C), 1 × 15 A (+70 °C)
-40 °C...70 °C
-40 °C...85 °C
> 60 °C / 75% load @ 70 °C
> 97% @ 24 V Input voltage
Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between.
125 / 32 / 125 mm / 502 g
cULus

0...60 V DC
2 × 24 A (-40 °C ~ +45 °C), 2 × 20 A (+45 °C ~ +60 °C), 2 × 15 A (+70 °C)
$V_{INPUT-typ. 0.7 V}$
1 × 48 A (-40 °C ~ +45 °C), 1 × 40 A (+45 °C ~ +60 °C), 1 × 30 A (+70 °C)
-40 °C...70 °C
-40 °C...85 °C
> 60 °C / 75% load @ 70 °C
> 97% @ 24 V Input voltage
Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between.
125 / 32 / 125 mm / 568 g
cULus

Connection data	
Connection system	
Number of terminals	
Wire cross-section, rigid min/max	mm ²
Wire cross-section, flexible min/max	mm ²
Wire cross-section, AWG/kcmil min/max	
Note	

Input	Output
Screw connection	Screw connection
4 (1+, 2+, 1-, 2-)	4 (++, --)
0.18 / 6	0.18 / 6
0.22 / 4	0.22 / 6
26 / 10	26 / 10

Input	Output
Screw connection	Screw connection
4 (1+, 2+, 1-, 2-)	4 (++, --)
0.18 / 6	0.5 / 16
0.22 / 4	0.5 / 16
26 / 10	22 / 8

Ordering data

Screw connection

Type	Qty.	Order No.
PRO DM 10	1	2486070000

Type	Qty.	Order No.
PRO DM 20	1	2486080000


Note

Note

Note

connectPower capacity modules


CP M CAP

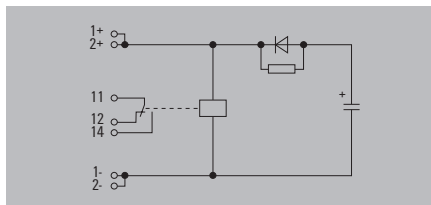

Pulse triggering for circuit breakers: with the Weidmüller capacitance module

The following conditions apply to the table entries:

- Ambient temperature of 20 °C
- Inner resistance of the circuit breakers is taken into account
- Half of the rated current flows to a neighbouring circuit before the short circuit is formed
- DC-compatible circuit breakers: Siemens 5SY series

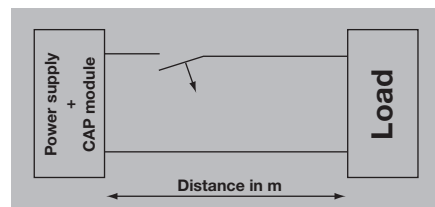

Technical data

Input	Rated input voltage / DC input voltage range
Output	Peak current output / Recovery time for the capacitor Switching thresholds
	Floating contact
General data	Depth x width x height / Net weight Ambient temperature (operational) / Storage temperature Humidity Protection degree Protection class Pollution degree Insulation voltage MTBF Mounting position, installation notice
EMC / shock / vibration	Noise emission in accordance with EN55032 Interference immunity test acc. to Resistance to vibration / Shock
Electrical safety (applied standards)	Electrical machine equipment For use with electronic equipment
Approvals	Approvals

Rated input voltage / DC input voltage range	24 V DC / 18...30 V DC
Peak current output / Recovery time for the capacitor	load dependent (typ. 40 A for 1 ms) / Approx. 1 sec.
Switching thresholds	21.6 V DC, relay is on for Power Good, 20.4 V DC, relay is off for Power Fail
Floating contact	Yes
Depth x width x height / Net weight	/ 150 / 34 / 130 mm / 725 g
Ambient temperature (operational) / Storage temperature	-25 °C...70 °C/40 °C...85 °C
Humidity	5...95 %, no condensation
Protection degree	IP20
Protection class	III, with no ground connection, for SELV
Pollution degree	2
Insulation voltage	0.5 kV <small>Input / output - Box</small>
MTBF	> 500,000 h in accordance with IEC 61709 (SN29500)
Mounting position, installation notice	Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circ. Can mount side by side with no space in between.
Noise emission in accordance with EN55032	Class B
Interference immunity test acc. to	EN 61000-4-2 (ESD) EN 61000-4-3 and EN 61000-4-8 (fields) EN 61000-4-4 (burst) EN 61000-4-5 (surge) EN 61000-4-6 (conducted) EN 61000-4-11 (dips)
Resistance to vibration / Shock	1 g according to EN 50178 / 15 g in all directions
Electrical machine equipment	Acc. to EN60204
For use with electronic equipment	Acc. to EN50178 / VDE0160
Approvals	CE; cULus; DNVGL; EAC

Fuse tripping

Conductor cross section	B6	B10
0.75 mm ²	10 m	
1.0 mm ²	14 m	6 m
1.5 mm ²	20 m	9 m
2.5 mm ²	30 m	15 m
4 mm ²	50 m	24 m
6 mm ²		
B16		
0.75 mm ²		
1.0 mm ²		
1.5 mm ²	4 m	
2.5 mm ²	6 m	
4 mm ²	10 m	
6 mm ²	16 m	
C2 C4		
0.75 mm ²	11 m	6 m
1.0 mm ²	14 m	8 m
1.5 mm ²	21 m	12 m
2.5 mm ²	34 m	19 m
4 mm ²		32 m
6 mm ²		
C6 C10		
0.75 mm ²	3 m	
1.0 mm ²	3.5 m	2 m
1.5 mm ²	5.5 m	3 m
2.5 mm ²	9 m	5 m
4 mm ²	14 m	8 m
6 mm ²		12 m

Connection data

Wire connection method	
Number of terminals	
Wire cross-section, rigid min/max	mm ²
Wire cross-section, flexible min/max	mm ²
Wire cross-section, AWG/kcmil min/max	
Note	

Input	Output
Screw connection	Screw connection
Number of terminals	3 (CO contacts)
Wire cross-section, rigid min/max	0.5 / 6
Wire cross-section, flexible min/max	0.5 / 2.5
Wire cross-section, AWG/kcmil min/max	26 / 12
Note	For low-impedance connections we recommend 2.5 mm ² .

Ordering data

	Plastic clip-in foot
	Metal clip-in foot
Note	

Type	Qty.	Order No.
CP M CAP	1	1222240000
CP M CAP	1	1222240010